

# J-Bevel Stinger Bead ECAP® Encapsulated

Threaded Knot Wheel Brush




**NEW!**


PFERD/ADVANCE BRUSH is pleased to announce the introduction of the new J- Bevel brush, specifically designed for use on narrow pipe bevels required for automatic pipe welding systems.

## ECAP® Encapsulation

- ECAP® Twist Knots: The tightly twisted and Encapsulated wire knots allows this tool to remove heavy scale, rust and other contamination easily during every step of the automatic welding process.
- Wire is bonded in a synthetic elastomer material which firmly supports the wire filaments, providing precisely controlled brush face, longer brush life and very aggressive removal rates. Limited flexibility.
- E4 is good for higher pressure applications. Black colour.

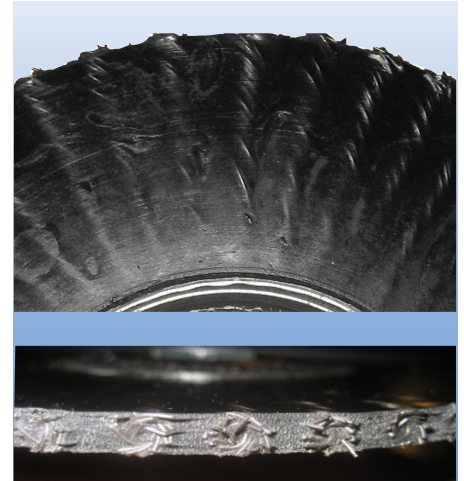

**J-Bevel Brush, Stringer Bead Twist, ECAP® Encapsulated**

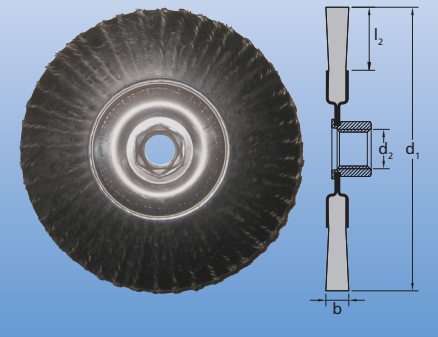

This 5" diameter encapsulated stringer bead wheel is ideal for cleaning welds and bevels created by automatic orbital welding equipment. Features extra-long 1-1/4" trim length, allowing the brush to reach into tight bevels used by automatic welders, even on heavy wall pipe. The narrow 3/16" wide brush face is designed to reach deep into bevels to clean out contamination beginning with the first weld bead.

### Recommendation for Use

For use with automatic orbital welding equipment.

**PFERD Specification Number**  
RBV



Brush Dia. (Inches)	Thread Size	Wire Size	No. of Knots	Trim Length	Face Width	ECAP® Grade	EDP No.	
							Carbon Steel	
5	5/8-11	.014	42	1-1/4	3/16	E4	83515	5

PFERD INC.  
30 Jytek Drive · Leominster, MA 01453  
Phone: (978) 840-6420 · Toll-Free: (800) 342-9015  
Fax: (978) 840-6421  
e-mail: sales@pferdusa.com · www.pferdusa.com

PFERD CANADA INC.  
5570 McAdam Road · Mississauga, ONT L4Z1P1  
Phone: (905) 501-1555 · Toll-Free: (866) 245-1555  
Fax: (905) 501-1554  
e-mail: sales@pferdcanada.ca · www.pferdcanada.ca

**PFERD** makes the difference